



Netbridge Infinity 2N-20ac

A 2.4/5GHz Dual-Radio 802.11ac Outdoor Access Point/ CPE



Netbridge Infinity 2N-20 ac

The Netbridge Infinity 2N-20 ac is an outdoor Wi-Fi access point with integrated 2.4/5GHz 2x2 MIMO radios, boasting an output power of 29 dBm. The Gigabit Ethernet port with 802.3af/at support allows users to power the device using PoE switches.

The Netbridge Infinity 2N-20 ac is specifically designed for cost-efficient, yet professional outdoor hotspot scenarios. The integrated 5GHz directional antenna allows the device to operate as CPE, whereas the 2.4GHz omnidirectional antennas (purchased as an accessory) are dedicated to hotspot scenarios in various environments, including campsites, hospitality, education, public Wi-Fi, and many more.

The IP67-rated enclosure, integrated surge protection, and professional mounting brackets ensure continuous operation even in the harshest of weather conditions.



Ininity Controller

The Ininity Controller is an intuitive product and network management platform for your Ininity devices. It allows easy, simple, and fast network installation, configuration, and control, all of which can be performed using a web browser.

The Controller also facilitates network maintenance and expansion by automating these processes. The management platform can function as an integrated controller or as an external one (i.e. Ininity Cloud Controller), thus serving as an optimal solution for setting up and managing networks of any size.



Automated Device Onboarding

Automated device onboarding (ADO) is the process of automatically setting up Infinity access points that are introduced to the network. Not only does ADO eliminate the discrepancies caused by manual setup, but it also simplifies the deployment process and saves valuable time.

Automated device onboarding requires one-time configuration of the Cloud AP, after which the settings are automatically applied to all Infinity access points that are newly-connected to the network using a physical connection.



Flexible Network Scaling

The External Infinity Controller is designed with various types of networks in mind, whether they contain just a few access points or thousands of them.

Networks can be categorized into different logical groups (up to 4 layers) based on geographical location, service type, company branch, or other criteria. Each group can have different configurations assigned to them and access points can easily migrate between networks.

Furthermore, the External Infinity Controller (installed on customer premises) supports multiple organizations simultaneously (many network owners).



Pay as You Grow

A cloud-based Infinity Controller account is free and supports a network of up to 10 Infinity wireless access points, but can be expanded as the business grows. Learn more about the paid version [here](#).



IP Session Logging

Infinity access points allow users to track and log end-user credentials (source/destination IPs and ports, MAC address, etc.) on the Internet, thus allowing a safer and transparent Internet service.



Predefined Scenarios for Your Applications

The Infinity Controller provides an array of features, collectively forming the optimal solution for multiple scenarios, e.g. a complete any-size office access point network, small café or shop hotspot, and an Easy Mesh application, which is popular among small hotels, schools, and hospitals.



Easy Mesh

Easy Mesh is Netbridge's solution to wireless network coverage expansion and device configuration automation. This feature is designed for the Infinity Series (as well as Airjet devices utilizing Infinity firmware) and is only available on the External Infinity Controller.

The Infinity Controller allows users to set up an Easy Mesh network in a plain and simple way: just have at least one LAN-connected AP, create a new Easy Mesh network, assign devices to it, and you are good to go!



Proximity

Netbridge access points have an integrated mobile device detection feature. This means that any device within range can be logged using the MAC address and date/time without any user interaction.

The data is exported in real time and can be used to improve the services of an enterprise or managed service provider by importing them into proprietary applications for analytics and insights. An API is available upon request.

Our website provides information on Netbridge's technological partners that are using this functionality. Several of our technological partners are already using this functionality.

Technical Specifications

Wireless

WLAN Standard	IEEE 802.11a/b/g/n/ac
Radio Operating Mode	2.4GHz Access Point (Auto WDS) 5GHz Station WDS, Station ARP NAT
Radio Mode	Dual 2x2 MIMO
Radio Frequency Band	2.402–2.484GHz (Country-Dependent); FCC 2.412–2.462GHz (CH1–CH11) 5.170–5.875GHz (Country-Dependent); FCC 5.745–5.825GHz (CH149–CH161)
Transmit Power	2.4GHz: 29dBm @ MCS0 5GHz: 29dBm @ MCS0
Channel Size	20, 40, 80MHz
Modulation Schemes	802.11ac: OFDM (256-QAM, 64-QAM, 16-QAM, QPSK, BPSK) 802.11a/g/n: OFDM (64-QAM, 16-QAM, QPSK, BPSK) 802.11b: DSS (CCK, DQPSK, DBPSK)
Data Rates	802.11ac @ 80MHz: 866, 780, 650, 585, 520, 390, 260, 195, 130, 65Mbps 802.11n @ 40MHz: 300, 270, 240, 180, 120, 90, 60, 30Mbps 802.11a/g @ 20MHz: 54, 48, 36, 24, 18, 12, 9, 6Mbps 802.11b @ 20MHz: 11, 5.5, 2, 1Mbps
Duplexing Scheme	Time Division Duplex
Wireless Security	WPA/WPA2 (TKIP/AES) Personal, WPA/WPA2 (TKIP/AES) Enterprise, WACL, Hotspot (UAM)

Antenna

Type	1x Integrated 5GHz Directional Antenna/ N-Type Connectors for External Antenna
Gain	20dBi (5GHz)

Wired

Interface	1x 10/100/1000 Base-T, RJ-45
-----------	------------------------------

Networking

Operating Mode	Bridge, Router IPv4 and IPv6
Management IPv4	Static, Dynamic
Management IPv6	Static, Dynamic Stateless, Dynamic Stateful
Secondary IPv4	Supported
VLAN	802.1Q for Management and Data
Virtual SSID	8 per Radio
Band Steering	Supported

Traffic Management

Client Isolation	Supported
Wi-Fi Multimedia (WMM)	Supported
Multicast Enhancement	Supported
Concurrent Clients	256

Services

Services	SNMP Server, NTP Client, System Alerts
----------	--

Discovery Services

Bonjour, CDP/LLDP, SSDP

Power

Power Method	802.3af/at with Passive PoE (48–56V) Support
Power Supply	100–240VAC to 48VDC PoE (Included)
Power Consumption	19W

Physical Specifications (excl. Mount & Connected Antennas)

Dimensions	199mm × 228mm × 51mm
Weight	1.1kg (2.42lbs)
Mounting	Pole Mounting Bracket Included

Environmental Specifications

Outdoor Ingress Protection Rating:	IP67
Operating Temperature	−40°C (−40°F) ~ +65°C (+149°F)
Humidity	0~90% (Non-Condensing)


Management

System Monitoring via SNMP v1, Full Management via External NFT Controller

Regulatory

Certification	CE
---------------	----

Package Contents

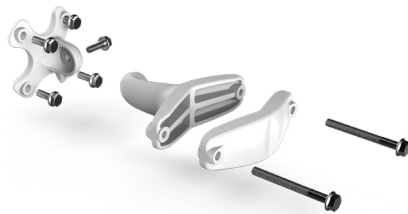

1x

NFT Blizzard 2ac-N-20 Device

1x

Device Mount




1x

48V DC Passive PoE with AC Cable


1x

Quick Instruction Guide



Antenna Specifications

5GHz

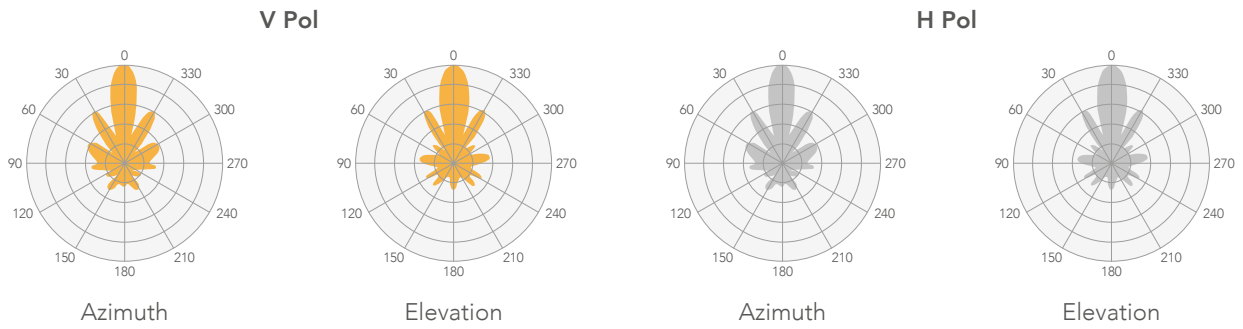

5GHz Internal Directional Antenna Specifications

Frequency Range	5.1–5.9GHz
Gain	20dBi
Polarization	Dual-Linear
Cross-Polarization Isolation	27dBi
VSWR	<1.8
Azimuth Beamwidth (H-Pol)	16°
Azimuth Beamwidth (V-Pol)	16°
Elevation Beamwidth	16°

